



VL2-30

COMPACT HF NVIS VEHICLE SEMI-LOOP ANTENNA SYSTEM

The VL2-30 is designed to provide high performance continuous close in omnidirectional communications with no skip zone.


The system requires only low RF transmit power to achieve continuous communications in the 0-1200km range. By using high angle radiation and just the 3-17 MHz frequency band, it operates as a NVIS (near vertical incidence skywave) antenna to provide reliable low noise communications. This mode is particularly useful communicating over hills or mountain ranges, where, for security reasons, long range radiation methods are undesirable.

The system uses either the vehicle's metal roof, minimum of 2000mm length or the optional 2000 x 330 x 6mm lightweight aluminium base plate mounted directly onto the vehicle or using the optional fully adjustable strap end cross bars. An ATU is required and can be supplied by Moonraker.

The ATU may be mounted remotely from the antenna but should be installed close by. Ideally it should be mounted on the base plate. Tuning over the band is automatic via the ATU with ALE possible, dependent upon the ATU itself. High performance is assured, even in environments subject to noise interference due to the inherent filter qualities of the design, which combines automatic frequency tuning, a narrow bandwidth and excellent NVIS propagation of the signal. An optional EMP/Overvoltage system is available for the antenna feed point.

For ease of transport the stainless steel antenna radiator breaks down into two short sections, each with end support insulated devices. When installed and not in use it may be laid flat on the vehicle roof via the unique lift and lay down joints.

Shock absorbing springs are used to assist survival when objects strike the radiator. Exterior metal surfaces are finished with a high durability epoxy based coating, highly resistant to chemical attack, abrasion and the effects of ozone and ultra-violet radiation.

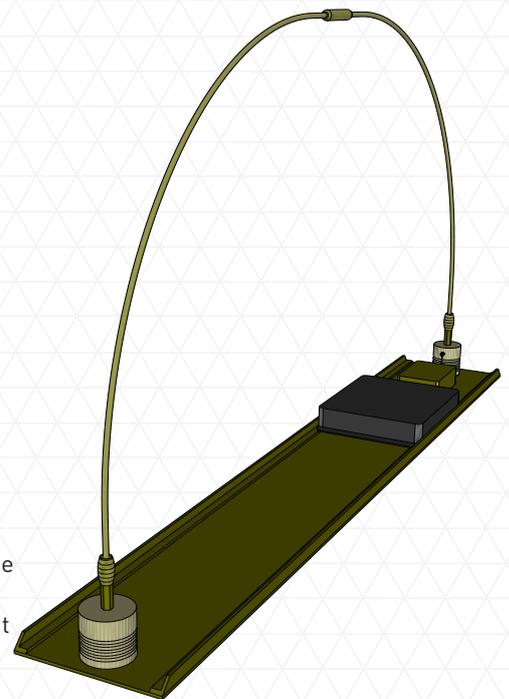

SPECIFICATIONS ▼

	STANDARD	OPTIONAL
Colour	Drab Olive	Other colours to order
Frequency Range	Overall 2-30 MHz	
NVIS Band	3-17 MHz	
Radiation Pattern	Hemispherical	
VSWR	<2:1, typically 1.6:1 2-30 MHz with suitable ATU	
Power Capability	150W CW, 300W PEP, dependent upon ATU capability	
EMP Overvoltage System Option	45kV 1.2/50 micro second (rise/fall times) voltage pulse, 5kA 8/20 microsecond current pulse.	
Antenna Dimensions	1000mm height to top of radiator at centre; 1880mm centre spacing between base insulators; 85mm diameter base insulators	
Base Plate optional	2000 x 330 x 6mm	
ATU Option	Tuning time initial <2 seconds, recurrent <10 milli seconds; Power capability 150W PEP, 50W CW, 12V DC (24V option) at 900 mA	
Weight	Antenna only: 2.2kg, Base Plate: 17.0Kg	



CONTACT DETAILS ▼

CBG Systems

9 Bender Drive, Derwent Park
Tasmania, AUSTRALIA 7009

T +61 3 6272 6105

F +61 3 6273 1716

E info@cbgsystems.com

www.cbgsystems.com

Moonraker products represent the pinnacle of antenna design. With over 45 years' experience supplying Defence, Commercial and Recreational industries. Moonraker antennas are individually tuned and manufactured to our stringent extreme marine quality standards that ensure maximum performance and service life.



CBGSystems